



WaterSaver


INNOVATIVE PRODUCTS FOR RESEARCH

WaterSaver Faucet
701 W Erie St
Chicago, IL 60654


312 666 5500 TELEPHONE
312 666 5501 FACSIMILE
wsflab.com

VALVES WITH ESCUTCHEON AND MOUNTING SHANK SIDE INLET MOUNTING SHANK POSITIONING


NOTE: MOUNTING SHANK IS INSTALLED IN "0" (TOP) POSITION UNLESS OTHERWISE SPECIFIED.

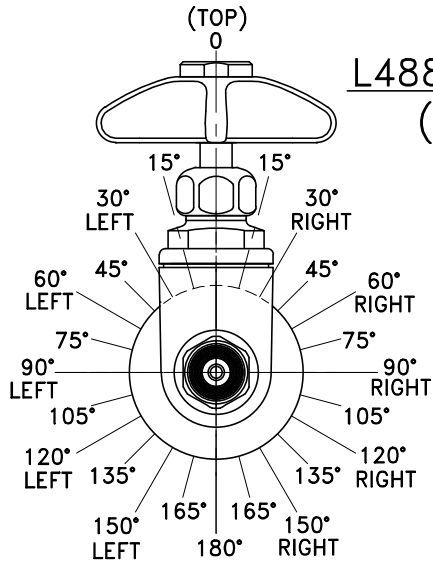


L4880F-226SI
(Series)

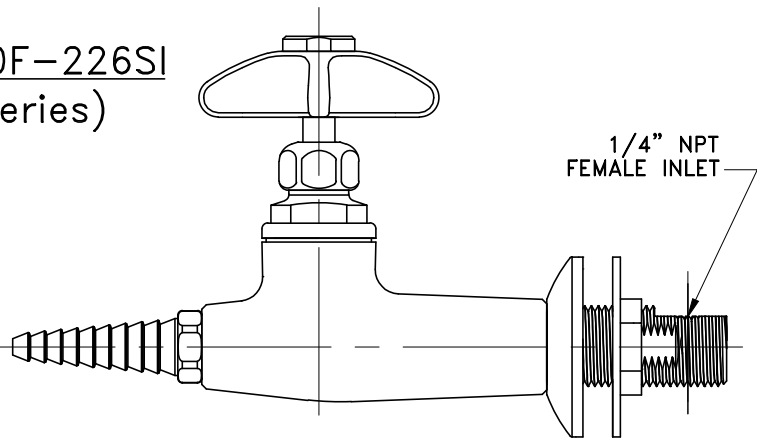


The Side Inlet (SI) is a 1/4" NPT female hole (not shown) perpendicular to the mounting shank. The end of the shank is closed. It is designed for making connections in tight spaces with minimal depth such as fume hood walls.

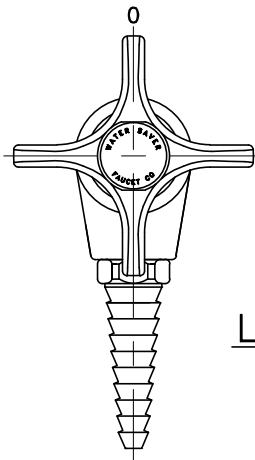


L5180F-226SI
(Series)

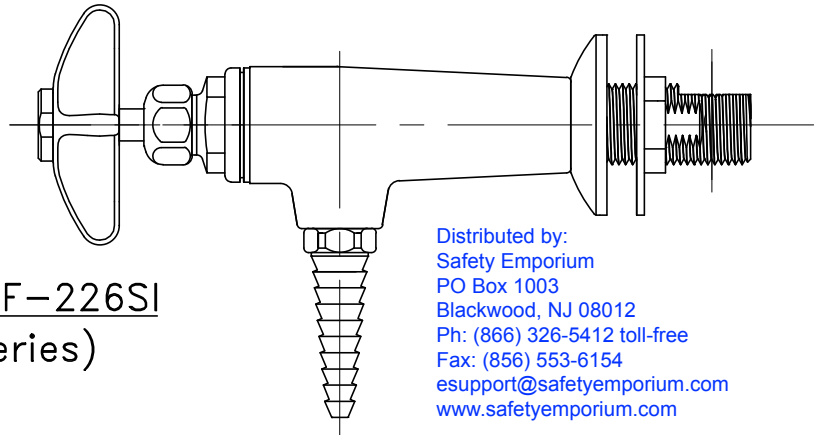

Distributed by:
Safety Emporium
PO Box 1003
Blackwood, NJ 08012
Ph: (866) 326-5412 toll-free
Fax: (856) 553-6154
esuport@safetyemporium.com
www.safetyemporium.com

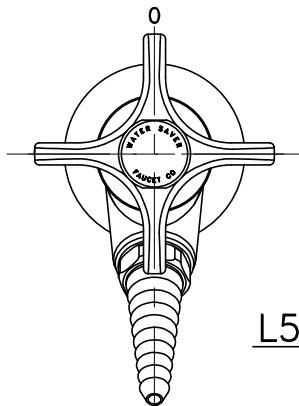

L5280F-226SI
(Series)

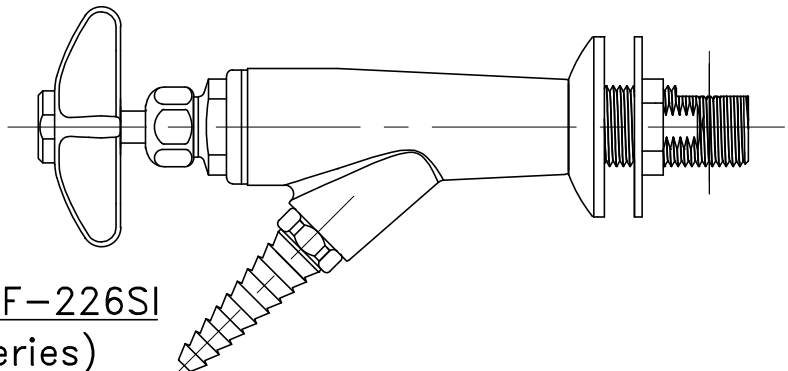

MEASUREMENTS MAY VARY $\pm 1/4"$ (6mm).

Drawing Number: _____

Revision Number: 112020-KJS